



# TECHNICAL DATA

DIESEL GENERATING SET

MPMC POWERTECH CORP.


50HZ

## MCS625S-1 / MCS625-1

### Features

- Compact structure high-strength chassis
- Easy operation and maintenance, Low cost
- Good performance damping system
- Compliance with international electrical safety standards of electrical system
- 8 hours base tank
- High-performance maintenance-free batteries with isolation switch
- 50°C radiator
- Top lifting, Forklift bottom hole design, easy to transport
- Industrial type muffler
- Noise reduction structure , Low overall noise
- Convenient power output interface and ATS Interface
- IP56 (control system)
- The personalized design for user
- Structure type genset Optional: Open (MCS625-1)  
Sound-proof (MCS625S-1)

Reference images, the actual shall prevail

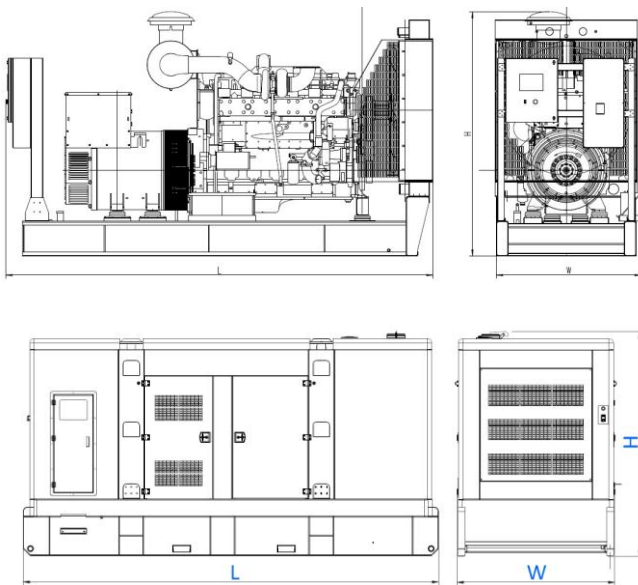

### Genset Technical Data

Output frequency	50 HZ
Rated speed	1500 rpm
Prime power	N.A.
Standby power	687.5 KVA
Rated voltage	400 V
Phase	3
Noise dB(A) @7m	70
Engine model	KTAA19-G6A
Alternator model	HCI 544FS
Fuel consumption of 100% load	127.8 Litres/h
Fuel consumption of 75% load	95.2 Litres/h
Voltage regulation rate	≤±1%
Random voltage variation	≤±1%
Frequency regulation rate	≤±5%
Random frequency variation	≤±0.5%

### Dimension and Weight

Generating set model	MCS625S-1	MCS625-1
Length(L) (mm)	4800	4053
Width(W) (mm)	1822	1541
Height(H) (mm)	2550	2234
Dry weight (k g)	6131	4664
Tank capacity ( L )	842	922

## Engine Specifications

Engine model	KTAA19-G6A
Engine manufacturer	Cummins
Number of cylinders	6
Cylinder arrangement	In-line
Cycle	Four stroke
Aspiration	turbo-charged & air-air after-cooled
Bore Stroke (mm mm)	159 x 159
Displacement (Liter)	18.9
Compression Ratio	13.0:1
Prime power/speed (kW/RPM)	N.A./1500rpm
Standby power/speed (kW/RPM)	610 /1500rpm
Speed governor	Electrical
Cooling system	Forced Water Cooling Cycle
Steady speed droop (%)	≤1%
Total lubrication system capacity (L)	50
Coolant capacity (L)	30
Fuel consumption at 100% load (g/kWh)	209(at 1500RPM)
Starter motor	DC24V
Alternator	DC24V

## Alternator Specifications

Rated frequency	50 Hz
Rated speed	1500 rpm
Alternator model	HCI 544FS
Rated output prime power	670kVA
Efficiency (%)	95.0%
Phase	3
Rated voltage	400 V
Exciter type	Self excited, Brushless
Power factor	0.8
Voltage adjust range	≥5.0%
Voltage regulation NL-FL	≤±1.0%
Insulation grade	H
Protection grade	IP23
X <sub>d</sub> DIR. AXIS SYNCHRONOUS	2.62
X' <sub>d</sub> DIR. AXIS TRANSIENT	0.14
X'' <sub>d</sub> DIR. AXIS SUBTRANSIENT	0.10
X <sub>q</sub> QUAD. AXIS REACTANCE	2.19
X'' <sub>q</sub> QUAD. AXIS SUBTRANSIENT	0.23

### Optional

Optional Alternator brand	Leroy Somer	mecc alte	MPMC
Optional Alternator model	LSA 49.1 S4A	ECO40-1.5L/4	LYG 354DC
Exciter type	Self-excited	Self-excited	Self-excited
Rated output prime power	625KVA	620KVA	625KVA

## Control System

### NSM-1250-3110(Standard)

All MPMC Gensets have a control cabinet (the Deepsea control module DSE3110 as standard) mounted on isolated support.

#### Main Features

- Manual and automatic mode
- Parameter configuration via RS-232 serial communication
- Remote control automatic start/shutdown
- Optional ECU control
- Optional CAN engines
- Optional speed sensor access
- PLC programming
- Operating temperature: -20°C to 70°C
- IP56 Rating
- Back-lit icon LCD display
- Power Save mode
- CAN and Magnetic Pick-up/Alt. versions available (specify on ordering)
- PC configurable
- 6 Digital inputs
- 4 Outputs (2 configurable on Magnetic Pick up/Alt., 4 configurable)



#### The control module display

- Generator voltage
- Generator frequency
- Battery voltage
- Engine speed
- Load current
- Engine run-time Hours
- Engine oil pressure (Panel Meter)
- Engine coolant temperature (Panel Meter)

#### Protecting Functions

- Over frequency / under frequency
- Over voltage / under voltage
- Over current
- Over speed /under speed
- Emergency stop
- Low oil pressure
- High water temperature
- Failure to start/Failure to stop
- Battery charger failure
- Comprehensive shutdown or warning on fault condition

## Control System

### NSM-1250-7320 (Optional)

NSM-100-7320 is an advanced control module based on micro-processor, It is an Auto Mains (Utility) Failure Control Module(AMF), have been designed to start and stop generating sets that include electronic And non-electronic engines. Include the additional capability of being able to monitor a mains (utility) supply. when main is not available, It can automatically start the engine and close generating sets breaker automatically, Accurately measure various operational parameters and display all values and alarms information on the LCD. In additional, it can automatically open breaker, and shutdown the engine after the main supply recovers.

### Main Features

- AMF and ATS and communication and expansion function
- Designed to work with electronic or non-electronic or gas engine simultaneously. (support many kinds of engines ECU).
- Manual, Automatic, Test and remote control mode selectable.
- Monitoring and measuring operational parameters of the mains supply and genset.
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections and multiple parameters display.
- Includes 12 inputs and eight outputs. 8 inputs are configurable and 4 outputs are configurable.
- Can be programmed using the front panel or by using the PC software.
- Support twelve languages. The language was edited by customer.
- Graded protection: pre-alarm, shutdown and electrical trip, flexible setting.
- The module can be pre-set for four operating modes and protecting parameters.
- Add DSE860 or DSE865 module, internet network monitoring can be realized.
- The firmware can be updated automatically, so customer can have the latest version.



### The control module display

- Generator voltage
- Generator frequency
- Battery voltage
- Engine speed
- Load current
- Generator KVA, KW, PF
- Engine run-time Hours
- Engine oil pressure
- Engine coolant temperature
- Real time clock for time and date, overall runtime

## Optional

### Engine

- Water Jacket Preheater
- Fuel-water separator
- Oil pump
- Oil preheater
- Battery preheater

### Alternator

- PMG excitation
- Space heater
- Winding Temperature Measuring

### Generator Set

- Tools with the machine
- Coolant (-30°C)

### Control System

- AMF function
- ATS control cabinet
- Double-frequency and double voltage
- Single phase
- ABB MCCB

### Fuel System

- 12 / 24 hour base tank (single wall)
- Dual wall base fuel tank
- Outside fuel tank
- Automatic fuel feeding
- Fuel level indicate

### Canopy

- Hired type
- Economy Oil heater
- Trailer

## Contact Us

### MPMC POWERTECH CORP.

Add:No.111 Luda Rd., Luyuan Industrial Zone, Pudong Shanghai China

Tel: +86 21 60970158 Fax: +86 21 60970155

Mobile: +86-18621857018 (Robert)

E mail : [sales@mpmc-china.com](mailto:sales@mpmc-china.com)

Web site : [www.mpmc-china.com](http://www.mpmc-china.com)



MPMC reserves the right to make changes in model, technical specification, color, configuration and accessories without prior notice.

Please contact the salesman before ordering.

DISTRIBUTED BY:

© 2013 by MPMC, All right reserved.



ISO9001:2008  
MPMC Generating Sets

